




E525 S/L Stereo Shotgun Microphone



The Superlux E525 is a stereo condenser shotgun microphone with a figure 8 side microphone for MS stereo recording. It has three selectable stereo pickup patterns to choose from; MS, XY-wide and XY-narrow.


The E525 features light weight aluminum alloy construction, strong directivity and excellent off axis rejection. The flat and extended frequency response results in clear and natural audio. The E525 has an integrated low frequency roll off switch and the low-noise characteristics and high dynamic range pre-amplifier minimize colorization.

It is supplied with a mic clip, shock mount, wind screen, carrying pouch and stereo XLR cable. The Superlux E525 is a cost effective solution for any professional requirement including live sound, theater, EFP, SNG, ENG, broadcast, video or film audio application.

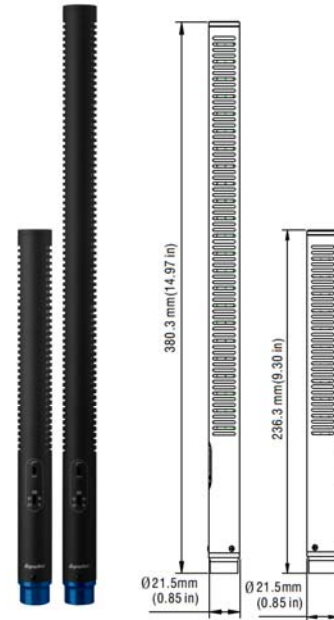


SPECIFICATIONS



Element	Stereo Electret Condenser
Polar Pattern	High Directivity Selectable MS, XY-N & XY-W
Frequency response	20—20,000 Hz
Sensitivity	-34dBV/Pa (9.0mV/Pa) at 1000 Hz ± 3dB
Impedance	200 Ohms
Max SPL	127dB at 1000 Hz (THD ≤ 1% 1kHz)
Equivalent Noise	22 dB (A-weighted)
Signal to Noise	72 dB
Dynamic Range	102 dB (1000 Ohm Load)
Low Frequency Roll Off	100 Hz, 12dB/Octave
Power Supply	Phantom Power 11-52 V
Connector	Integral 5 pin Male XLR
Dimensions	.85" dia. x 9.33"(S) 14.97" (L)
Weight	3.65 oz. (S) 5.42 oz. (L)

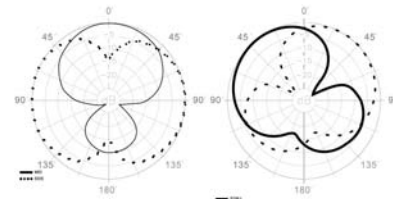

E525S

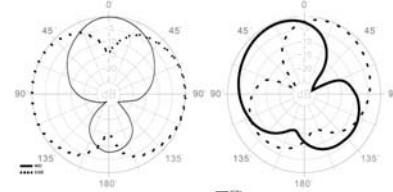

E525L

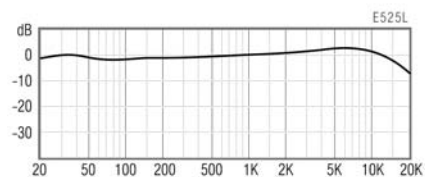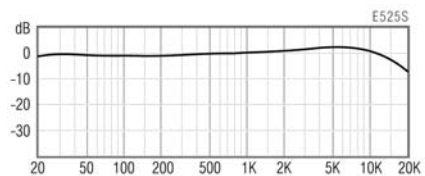

6655 Troost Avenue
 Kansas City, Missouri 64131
 Telephone (816) 581-9103 Fax (816) 581-9104
 Toll Free (877-447-9216 www.avlex.com