



The Superlux D112/C is a dynamic microphone specifically designed for harmonica players. It fits comfortably in your hand and is easy to hold with a harmonica while performing.

A detented volume control is perfectly placed underneath the mic, (figure 1), that is easy to access while playing. The tailored frequency response is ideal for reproducing that classic blues sound many harp players are looking for.

The D112/C has a built in 20 foot cable and is designed with a high impedance ¼" phone output connector that easily connects to a guitar amplifier or other high impedance input.

The Superlux D112/C can also be used plugged in to a low impedance equipment such as a mixer by using the Superlux CP-828 high Z / low Z converter; purchased separately.

**SPECIFICATIONS**

Element	Dynamic
Polar Pattern	Omni-directional
Frequency response	100—6000 Hz
Sensitivity	-48dB/V (4mV/Pa) at 1000 Hz
Impedance	High impedance, unbalanced
Minimum Load Impedance	1000 ohm
Cable	20 foot cable, 1/4" M Phone connector
Weight	22.93 oz.

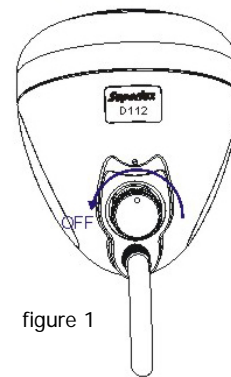


figure 1

**Frequency Response**

