

Superlux[®]**PROFESSIONAL GRADE****PRA-618 Gooseneck Microphones**

The Superlux PRA-618 quick-mount dynamic gooseneck is designed primarily for speech and vocal reinforcement applications. These versatile install products are ideal in boardrooms, conference and meeting rooms, simultaneous translation environments, council chambers, courtrooms, places of worship and more.

The PRA-618 is available in two overall lengths; 18" (M) or 24" (L). It features a super cardioid dynamic capsule, a quick-mount XLR connector and a comes with a compression-lock flange mount. Whether it is on a lectern or pulpit, on a desktop or conference table, restaurant or airport, the Superlux family of gooseneck microphones are the perfect solution.

FEATURES

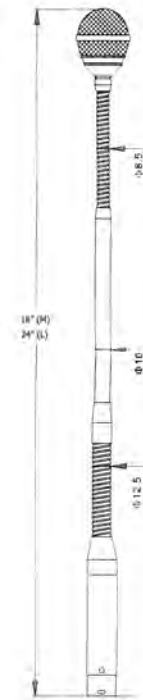

- Super cardioid polar pattern
- Dynamic capsule
- RF Shielding
- 18 (M) or 24 (L) inch overall length
- Compression-lock flange mount included
- ISO 9001 Certified

REPLACEMENT PARTS & ACCESSORIES

- S18 Black foam windscreen
- HM22 Compression-lock flange mount
- HM23 Shock mount
- HM24 Premium shock mount, tinned leads
- HM24C Premium shock mount, XLR termination
- HM-30 Stand mount

SPECIFICATIONS

Element	Dynamic Capsule
Polar Pattern	Super Cardioid
Frequency response	100—15,000 Hz
Sensitivity	-56dBV/Pa (1.6mV/Pa)
Impedance	500 Ohms
Max SPL	140dB (1000 Ohm Load)
THD	≤ 1% 1kHz
Connector	Integral 3 pin Male XLR
Finish	Black
Weight	7.8 oz.

**PRA-618 Gooseneck**

Avlex
Corporation

Toll Free: 877-447-9216 Toll Free Fax: 877-462-9216 www.avlex.com