


# MM-205L 500 mm Gooseneck Microphone

## Features

- Combined with LED ring indicator, the speaking status can be identified.
- MM-2 Series gooseneck microphones can be bent at wide angles and are ideal for conference room and church applications.
- Multi-layered microphone grille effectively eliminates pop noise.
- 4 pin XLR plug, fits wired BC-100 and wireless BC-T Series conference microphone bases.

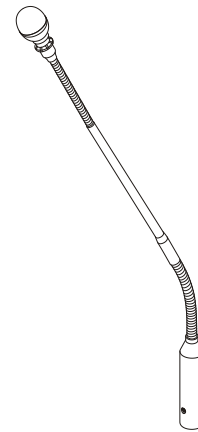

## Specifications

|                    |   |
|--------------------|---|
| Color              | Black, with LED ring indicator            |
| Indicator          | Red LED ring indicator                    |
| Capsule            | 10 mm unidirectional condenser microphone |
| Frequency Response | 50 Hz – 18 kHz                            |
| Sensitivity        | -46 ± 3 dBV / Pa (0 dB = 1 V / Pa)        |
| Max. SPL           | 142 dB                                    |
| Output Jack        | MIPRO 4-Pin XLR male (DC 5 V)             |
| Phantom Power      | DC 5 – 9 V                                |
| Length             | 500 mm                                    |
| Weight             | Approx. 180 g                             |