


ACT-2412A Detachable Antenna Dual-Channel Digital Receiver

Key Features

- Stable digital FSK modulation circuitry. All frequencies are located in this band.
- Employ Frequency Hopping Spread Spectrum technology, and each channel presets 4 hopping frequencies that skip the Wi-Fi frequency in use.
- The adaptive tracking algorithm helps effectively avoid interference from 2.4GHz communication products.
- With dual tuner true diversity receiving, the receiving distance is up to 100 meters (330 ft.) with no signal drop-out.
- The precisely designed PCB is enclosed in a sturdy case.
- Graphic OLED screen.
- The included battery of the rechargeable handheld and bodypack transmitters can be easily removed or interchanged for charging.
- An affordable price for entry-level consumers and the music instrument market.

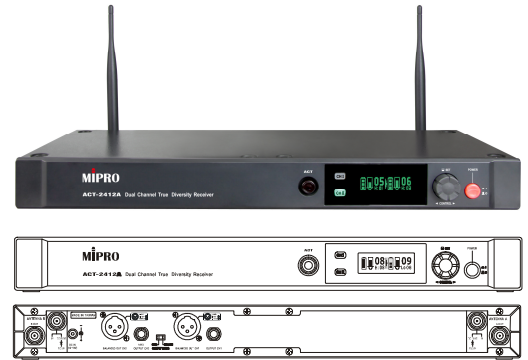

Transmitters & Microphones

ACT-24HC	Digital Handheld Transmitter
ACT-24TC	Digital Bodypack Transmitter
ET-24	Digital Erhu Microphone Set
MT-24	Digital Guitar Transmitter
ST-24	Digital Saxophone Microphone Set
VT-24	Digital Cello Microphone Set

Accessories

FB-72	Rack Mount Kit
--------------	----------------

Technical Specifications

Chassis	EIA Standard 19" 1U
Display	Graphic OLED
Frequency Range	ISM 2,400 – 2,483.5 MHz
Preset Frequency	12
Frequency-hopping	Each channel has 4 preset hopping frequencies
Receiving Mode	Dual-tuner Digital Diversity
Audio Sampling	24-bit / 44.1 kHz
Sensitivity	-95 dBm
S/N Ratio	> 115 dB(A)
T.H.D.	0.1 % @ 1 kHz
Audio Frequency Response	20 Hz – 20 kHz (-2 dB)
Output Connectors	Balanced XLR & Unbalanced 6.3 mm (1/4 ")
Audio Output Adjustment	0 dB (standard), -10 – +20 dB adjustable range
Latency	< 4.0 ms
Power Supply	External AC Power Supply
Power Consumption	2.4 W
Dimensions	420 × 44 × 180 mm / 16.5 × 1.7 × 7.1 "
Weight	Approx. 1.4 kg / 3.1 lbs
Operating Temperature	-10 – +60°C



MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw